


B.O.M. for PTK-XX

ITEM	QTY.	PART NO.	DESCRIPTION
3	(A)	-	16 AWG THHN 90 DEG C OR EQUIV - BLUE
4	(A)	-	16 AWG THHN 90 DEG C OR EQUIV - BROWN
5	2	802304	3M #902 - IDC WIRE TAP 12 TO 18 AWG
8	1	802411-02	PHOENIX CONNECTOR - 2 POLE #1911965
9	2	802414-06	PANDUIT INSLD. FERRULE - 16AWG #FSD78-8-D
11	1	802420-01	HEAT SHRINK, WHITE PRINTABLE - DETAIL A

(A) QTY = 20 FOR PTK-20, QTY = 30 FOR PTK-30

ASSEMBLY NOTES:

1. MARK TEXT OF PART NUMBER (PTK-XX WHERE XX = LENGTH IN CM) AT APPROXIMATE POSITION SHOWN IN BLACK UPPER CASE GOTHIC STYLE CHARACTERS. CHARACTERS SHALL BE CLEARLY LEGIBLE AND SHARPLY DEFINED. MARKING MATERIAL SHALL BE PERMANENT, NON-NUTRIENT AND NON-CONDUCTIVE.
2. PLACE LABEL APPROXIMATELY 1" FROM TERMINATION POINT TO BEGINNING OF LABEL EDGE.
3. LABEL MUST BE A HEAT SHRINKABLE WIRE MARKER SLEEVE. HAND WRITTEN OR WRAP AROUND TYPE LABELS ARE NOT ACCEPTABLE.
4. FOLLOW MANUFACTURERS INSTRUCTIONS FOR WIRE STRIP LENGTH AND RECOMMENDED TIGHTENING TORQUE ON ALL SCREW TERMINATIONS
5. ITEM 11 SHIPPED LOOSE WITH ASSEMBLY AND FIELD INSTALLED

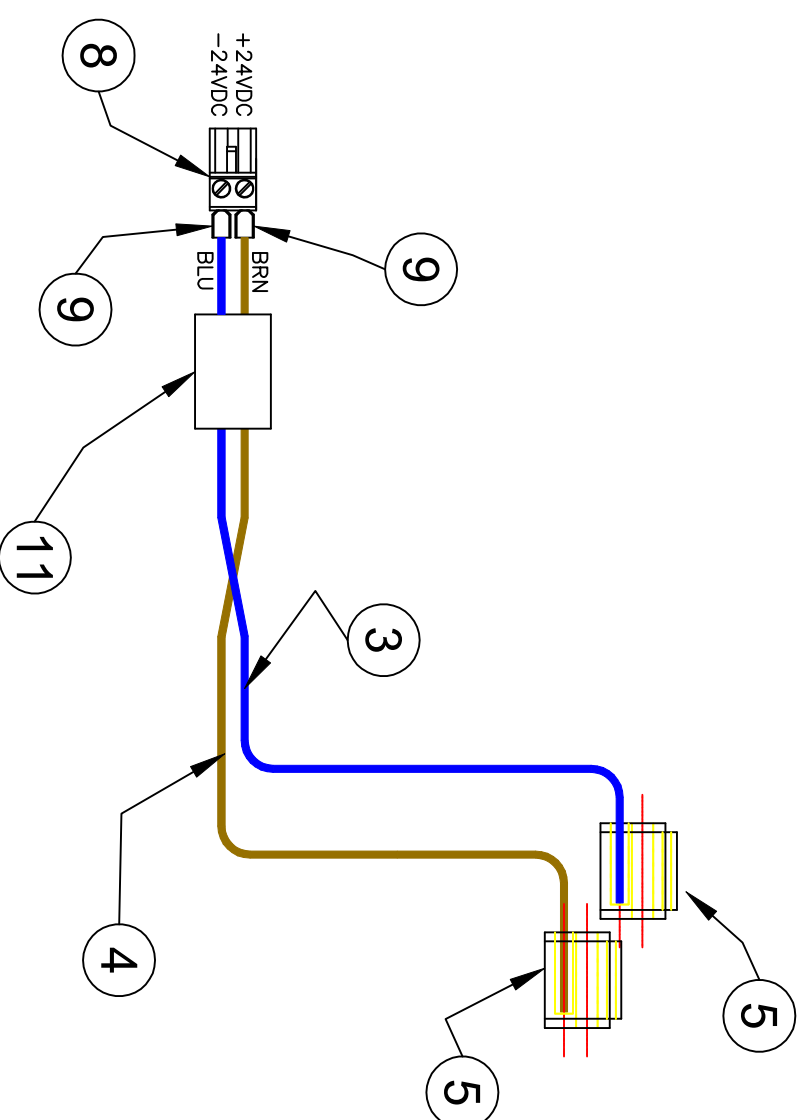

REV.	DATE	DESCRIPTION	✓

<p>THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL, IS SUBMITTED IN CONFIDENCE, AND IS PROPRIETARY INFORMATION ONLY IN CONNECTION WITH SAID PERFORMANCE OF THE CONTRACT OF WHICH THIS DRAWING FORMS A PART, AND SHALL NOT, WITHOUT PULSEROLLER PRIOR WRITTEN APPROVAL, BE REPRODUCED OR IN ANY OTHER WAY USED IN WHOLE OR IN PART BY OTHERS.</p>	<p>DATE: 16-APR-2020 DESIGNED BY: JPK CHECKED BY: SCALE: NONE SHEET: 1 OF 1</p>	<p>TITLE: POWER TAP KIT PART NUMBER PTK-XX</p> <p>FOR: CONVEYLINK ACCESSORIES PULSEROLLER STANDARDS</p> <p>DWG. NO: PTK-XX</p>
---	---	--

