




SENERGY

Part number definition

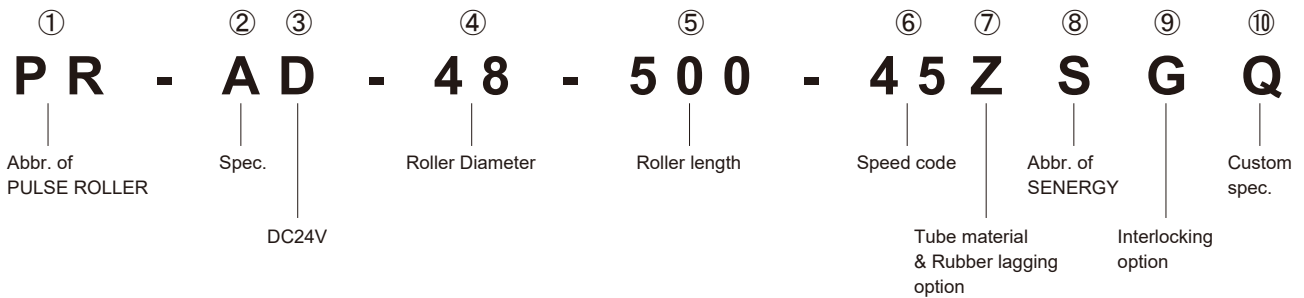

② Spec.

- | | |
|--------------------------------------|------------------------------------|
| A --- Standard | B --- Built-in brake |
| W --- Wash-down rated (IP-66) | Z --- Freezer spec. (-22°F) |

④ Roller Diameter

- | | |
|--------------------|--------------------|
| 48 ---φ48.6 | 50 ---φ50.0 |
| 57 ---φ57.0 | 60 ---φ60.5 |

⑤ Roller length

Dimension RL (Unit: mm) *Available for every 1 mm unit

⑥ Speed code

Selection of speed range *See Characteristics data table for available speed codes.

⑦ Tube material & Rubber lagging option

- Z** --- Steel, Zinc plating, No lagging *Z is standard for Dia. 48.6 and 50.
- A** --- Steel, Unichrome plating, No lagging *A is standard for Wash-down rated and Dia. 57 & 60.5.
- J** --- Stainless tube
- B** --- 3 mm Black rubber lagging
- W** --- 3 mm Urethane lagging
- K** --- 3 mm Kastalon sleeve (orange)

⑨ Interlocking option

- A** --- Plain straight, No interlocking
- B** --- V pulley
- G** --- Round groove
- H** --- Micro V-pulley (Poly vee)
- D** --- Dual sprockets

⑩ Custom spec.

- Q** --- Standard
- Y** --- Special